

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 June 2005 (30.06.2005)

PCT

(10) International Publication Number
WO 2005/058534 A1

(51) International Patent Classification⁷: **B23C 5/20**

(21) International Application Number:
PCT/SE2004/001853

(22) International Filing Date:
13 December 2004 (13.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0303371-9 16 December 2003 (16.12.2003) SE

(71) Applicant (for all designated States except US): SAND-
VIK AB [SE/SE]; S-811 81 Sandviken (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): PANTZAR, Göran
[SE/SE]; Sörhyvägen 41, S-810 22 Årsunda (SE).

(74) Agent: KLÖFVER, Jörgen; Sandvik AB, Intellectual
Property, S-811 81 Sandviken (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SI, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: MILLING TOOL WITH OVERLAPPING INSERTS

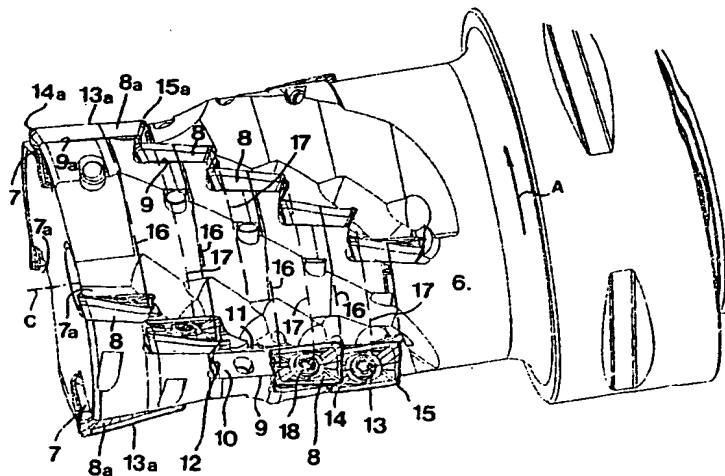

(57) Abstract: The invention relates to a cylindrical cutter of the type that comprises a milling body (1) rotatable around a geomet-
rical axis (C) having an envelope surface (6) extending rearward from a end (5), in which surface a plurality of tangentially spaced
flutes (7, 7a) are formed, which separately includes a plurality of axially spaced-part insert pockets (9) for releasably mounted cut-
ting inserts (8), the active edges (13) of which are partially overlapping each other, more precisely in imaginary, radially extending
appurtenant cutting insert (8a) in a first flute (7), has another length than the other insert pockets and the cutting inserts, respectively,
in the same flute in order to axially displace said overlapping planes (16, 17) in relation to each other and in such a way guarantee
that the machined surface always is passed by at least one entire edge, at the same time as the cutting edges of all front cutting inserts
extend up to a common radial plane adjacent to the front end while forming a full effective milling cutter.